

# PHOS 25 LT – SPECIFICATIONS



item:..... PHOS 25 LT  
 body:..... steel / aluminium  
 weight: .....2.95 kg  
 environmental conditions: .....3-phase lighting tracks, dry indoor environments only  
 ambient temperature: ..... -30° C – + 35° C  
 cooling: .....passive cooling  
 noise level: ..... 0 dBA  
 light source: .....20 W High Power LED  
 recommended projection distance in normal room light: ..... 13 ft  
 recommended projection distance in darkness: ..... 33 ft  
 average lifetime of the LED (L70):.....35,000 hours  
 colour temperature:.....6,300 - 6,700 K  
 luminous flux of the LED:..... 1,800 lumens  
 gobo size / image size: ..... Ø 50 mm / Ø 40 mm  
 input voltage: ..... 220 - 240 V AC, 50 / 60 Hz  
 power consumption:.....25 W  
 efficiency:..... 0.6 cos. φ  
 electrical protection:.....I  
 ingress protection rating: ..... IP 20  
 photobiological safety according to ICE62471:2006 EN62471:2008:..... RG-2  
 item number: .....20025210 – white, 20025220 – black, 20025230 – silver


PHOS 25 LT is equipped with the latest LED technology and is passively cooled without a fan. This budget-priced entry level model can flexibly be attached to 3-circuit lighting tracks. For its 22 watts High-Power LED we recommend a projection distance of 10 feet in normal room lighting. The projector is particularly suitable for use in smaller shops, doctors' offices and chemist's shops, where an operation with low heat emission is essential. The projection motif (gobo) can be changed without tools.

## Components

Standard series with high power LED and 85 mm standard lens. The machine is ready to plug in and run. Required accessories: glass gobo with individually designed motif.




## Dimensions

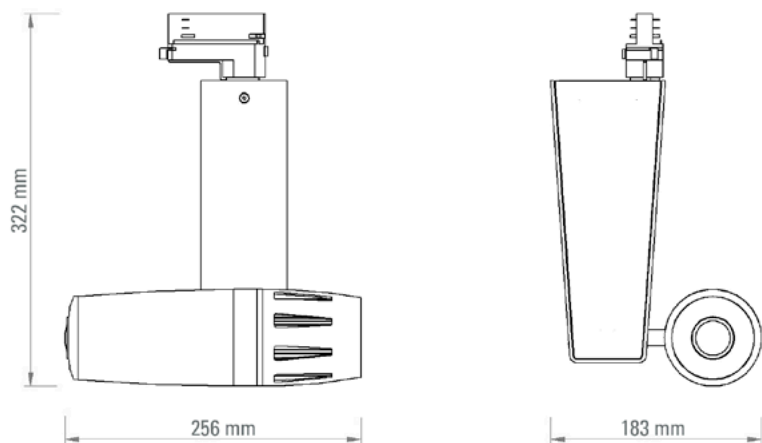

## Projection Size

Standard Lens,  $f = 85 \text{ mm}$

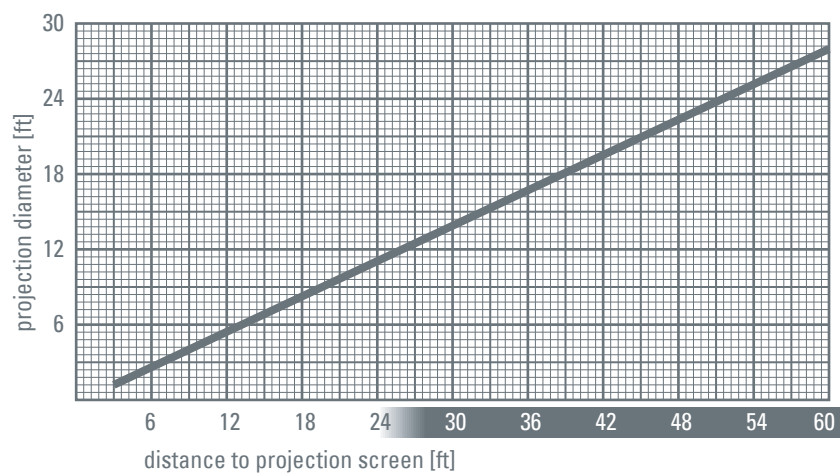

derksen®  
lichttechnik

Derksen Lichttechnik GmbH  
Sauerlandstraße 5  
45889 Gelsenkirchen  
Germany

Tel.: +49 (0)209 / 9 80 70 0  
Fax: +49 (0)209 / 9 80 70 60

info@derksen.de  
www.derksen.de