

MXE5 DSP matrix mix engine 24x24 channels



- DSP matrix mixer focused on performance audio
- Combining matrix control with mixing functionality
- 24x24 matrix with Dante/OCA
- Controlled via SONICUE
- 12 mic/line inputs, 8 line outputs

The MXE5 Matrix Mix Engine is a 24 x 24 audio matrix and system controller with professional sound quality, intuitive zone mixing features, Dante network and AES70 control. Featuring leading-edge 48 / 96 kHz signal processing, extremely low audio signal latencies, professional routing and mixing functionalities, it is the perfect fit for venues requiring high quality foreground music, such as stadiums and sports facilities, live music venues, contemporary churches, performing art centers, theatres, conference centers and clubs.

MXE5 is completely integrated into Dynacord's SONICUE Sound System Software for easy control. Dedicated user control is possible via the Touch Panel Controller with intelligent zone control and unique universal wall box compatibility.

Parts included

Quantity	Component
1	MXE5 DSP Matrix Mix Engine
10	6-pin Euroblock-type connector, inputs/outputs
1	15-pin Euroblock-type connector, control port/ GPIO
2	Mains input AC power cables, US- and EU-types
1	Installation manual
1	Safety instruction booklet

Technical specifications

DESCRIPTION AND FEATURES

MXE5 DSP Matrix Mix Engine	Audio system manager with integrated matrix mixing, signal processing, network routing, system control and supervision
Audio	24 x 24 channel audio mix matrix 12 analog inputs, 8 analog outputs 24 OMNEO / Dante network inputs and outputs
Safety / Redundancy	Internal supervision, system monitoring, watchdog, fault output Redundant audio networking supported
Configuration and Control Software	SONICUE audio system design and control application Integration of MXE series, remote amplifiers, loudspeakers, peripheral devices Configuration, control, and monitoring for complete audio systems Programmable user control panels and access levels

AUDIO SPECIFICATIONS

Frequency Response

ref. 1 kHz, analog in to analog out, 48 kHz 20 Hz to 20 kHz (± 0.5 dB)

ref. 1 kHz, analog in to analog out, 96 kHz 20 Hz to 40 kHz (± 0.5 dB)

Signal to Noise Ratio

A-weighted, analog input > 118 dB

A-weighted, analog output > 118 dB

A-weighted, analog input to analog output > 115 dB

EIN Equivalent Input Noise < -128 dB

20 Hz to 20 kHz, A-weighted

THD+N < 0.002 %

1 dB below max., @ 1 kHz

Common Mode Rejection > 70 dB

@ 1 kHz, nominal Level

Phantom Power +48 V / 10 mA, switchable per analog input

Voltage @ Current

Input gain 0 dB to +60 dB

Analog inputs

DIGITAL SIGNAL PROCESSING

Sampling rate 48 kHz / 96 kHz, OMNEO / Dante synchronized

Signal Delay / Latency

Analog In to Analog Out, 48 kHz / 96 kHz < 0.45 ms / < 0.22 ms

Signal Processing 32/40 bit, floating point

Filter PEQ, Lopass, Hipass, Loshelv, Hishelv, X-Over, FIR

Dynamics Ducker, Compressor, Noisegate

Limiter Peak (PA) limiter, RMS / TEMP limiter

Pilot tone Generator, Detector with Notch

Generators Sine, Pink noise, White noise

Mixer/Router Router, Mixer, Matrix Mixer

Misc VU Meter, Level, Polarity, Mute, Delay

Special Algorithms Speaker Processing

Memory

DSP Presets 60

CONNECTIVITY

Analog Audio Input / Output

Type 12 mic/line level inputs, 8 line level outputs, electronically symmetric

Connectors 10 x 6-pole Euroblock connectors, 2 channels each

Nominal Input / Output Level +6 dBu / 1.55 V

Maximum Input / Output Level +22 dBu / 9.7 V

Reference level equal to digital input +22 dBu for 0 dBFS

Input Impedance, active balanced 2.2 k Ω

Output Impedance, active balanced 47 Ω

Min. Load Impedance 600 Ω

Network


Type 3 x RJ45

Standards 1000base-T / 100base-TX, integrated switch

Network Audio Inputs 24 channels, 48 kHz / 96 kHz, OMNEO/Dante format

Network Audio Outputs	24 channels, 48 kHz / 96 kHz, OMNEO/Dante format
GPIO Control Port	
Type	15-pole Euroblock connector
Ports and Operating Modes	8 x GPIO, switchable Analog In / Digital In / Digital Out
Analog Input Range	0 V to +11 V, 110 kΩ input resistance
Digital Inputs	ON: < 1.5 V OFF: > 2.0V, internal pull-up (10 kΩ)
Digital Outputs	ON: Output switched to GND, max. 200 mA OFF: Open Collector (110 kΩ to GND)
Reference Voltage Output	+10 V, max. 200 mA, supervised, short circuit protected
READY / FAULT contact	Galvanic isolated relay, max. 30 VDC / 500 mA
Mains Input	1 x IEC appliance inlet
USER INTERFACE	
Display	Black/white OLED 256 x 64 pixel
Front panel indicators	12 x Input LEDs (Signal/Clip) 12 x Phantom Power LEDs (+48 V) 8 x Output LEDs (Signal/Clip) 4 x status LEDs (POWER, STANDBY, FAULT, OMNEO)
Front panel operating elements	3 push buttons (UP, ENTER, DOWN)
Rear panel indicators	1 x status LED (STATUS)

Rear panel operating elements	Mains Switch
GENERAL SPECIFICATIONS	
Power Requirements	100 V to 240 V, 50 Hz to 60 Hz AC
Power Consumption	
Operating Mode	50 W typical, 55 W max
Standby Mode	< 27 W
Protections	High Temperature, Mains Over-/Undervoltage Protection
Cooling	Front-to-rear, temperature controlled fan
Ambient Temperature Limits	-5 °C to +45 °C (+23 °F to +113 °F)
Operating Altitude	2000 m
IEC Protection Class	Class I (grounded)
Electromagnetic Environment	E1, E2, E3
Certifications	CE, IEC 62368, IEC 60065, CAN/CSA 60065:16, UL Std No. 60065-2015, EN55032, EN61000-3-2, EN61000-3-3, EN55103-2, FCC Part 15 Class B, ICES-003, RoHS/WEEE compliant
Color	Black
Dimensions (W x H x D)	483 x 43.5 x 471 mm (19", 1 HU)
Weight	6.0 kg (13.2 lb)
Shipping Weight	8.1 kg (17.9 lb)

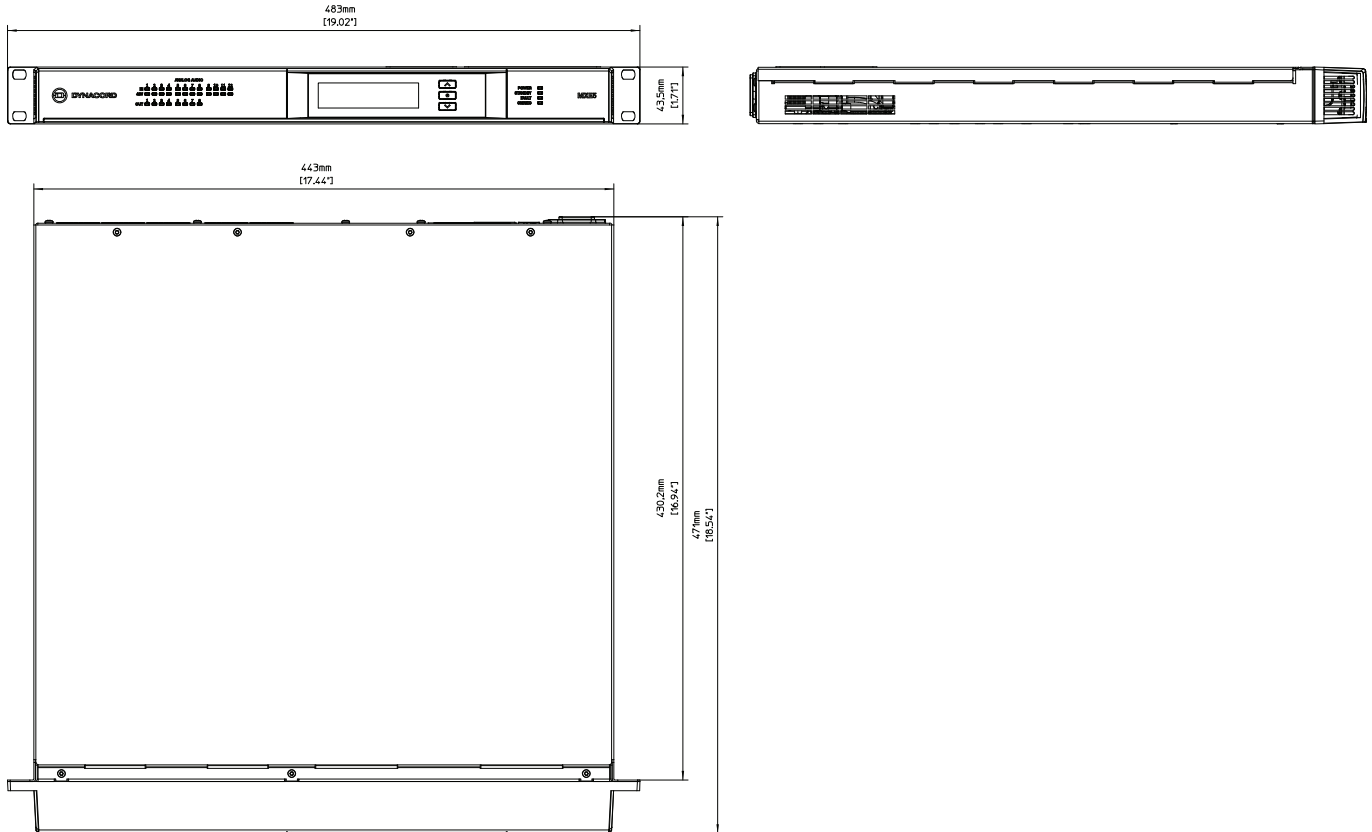

Dimensions: MXE5

Ordering information

MXE5 DSP matrix mix engine 24x24 channels

12 mic/line, 8 line outputs, 24x24 Dante channels,
48kHz / 96 kHz sample rate, GPIO and OCA controller
Order number **MXE5**

Germany:

Bosch Sicherheitssysteme GmbH
Robert-Bosch-Ring 5
85630 Grasbrunn
Germany

Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, NY 14450
USA

www.dynacord.com