



CABBAR-PIX-740-PRO

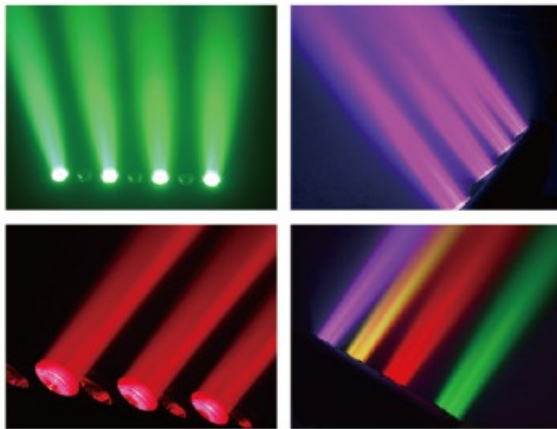

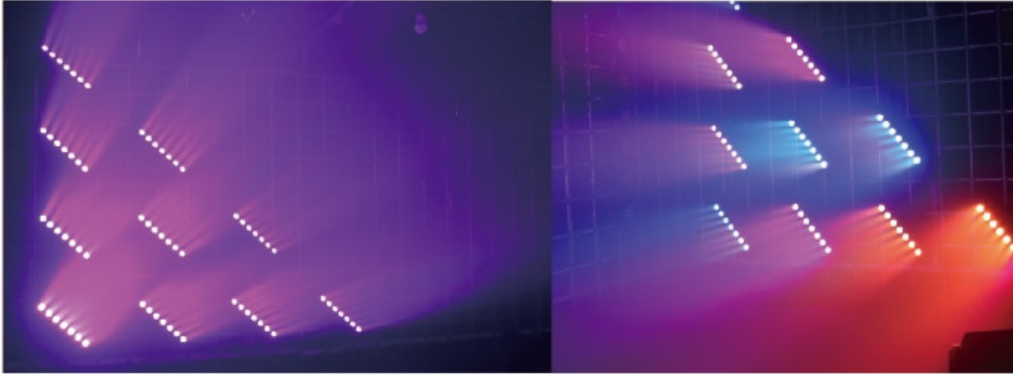

Product Specification

- Rated Voltage: AC100V~240V 50-60HZ
- Rated consumption: 380W
- LED Qty: 7x40W high power RGBW LEDs
- LED drive current: 2.5A
- Beam angle: 5°
- IP class : IP20
- 3 kinds of DMX mode: 18CH (Basic) /20CH(Stand)/44CH(Extend)
- Packaging size: 810x390x360mm
- N.W: 17KG
- G.W: 20KG


Product Feature

- 3 Pin XLR input and 3 Pin XLR output
- Artnet control: RJ45 input & RJ45 output
- Power Connect: PowerCon input & PowerCon output
- 4 kinds of control mode:DMX512、Artnet、Sound、Master-Slave
- 2.4 inch TFT color display
- 4 touch button
- Display board can be reversed by 180°,it is fit for in different places
- Indoor working temperature: -20°C ~ +40°C
- 3 kinds DMX modes : 18CH (Basic mode) /20CH(Stand mode)/44CH(Extend mode)
- Dimmer :0-100% linear dimmer
- Pan/Tilt operation:
 - ※ 16bit fine adjustment
 - ※ Smooth and accurate positioning
 - ※ Pan: 540°Tilt270°rotation
 - ※ Pan、tilt high speed infinite operation,and speed adjustable
 - ※ Scan position to memory .Reset automatically without any expected memory

Product Feature

- Correcting function in Pan- tilt
- Motor can be set up forward and reverse
- Each LED can be controlled individual
- Multiple cross beam effect
- Perfect mixing and rainbow effect
- Dimmer for all colors
- 0-20HZstrobe、pulse strobe、 asynchronous strobe effect
- Special cooling system
- CE ROHS

Dimensions

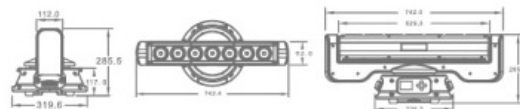

Photometric Data

(Unit LED)				
R	796.5	186.2	79.7	43.8l ux
G	1284	329.4	143.2	76.8l ux
B	264.5	67.3	29.4	14.2l ux
W	2430	621.1	279.2	153.1l ux
RGBW	3903	1012	435.8	252.3l ux

